
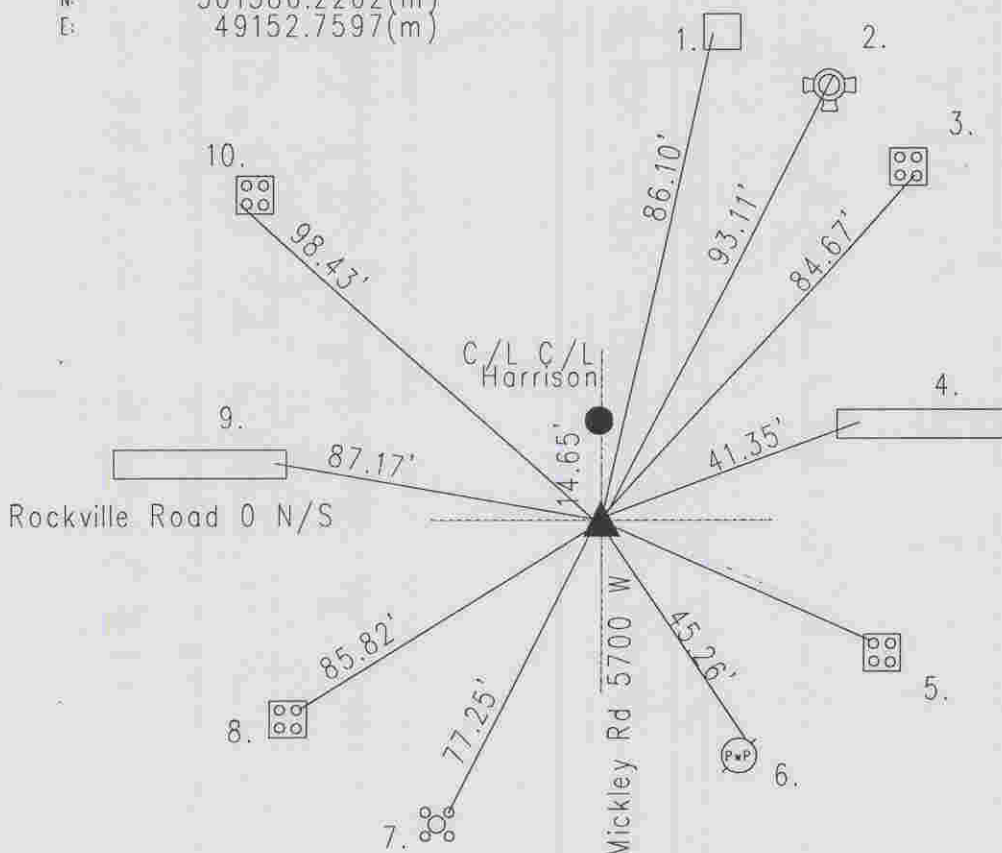


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 12 TOWNSHIP 15 RANGE 2
DATE: 5-5-2000 2-18-05
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 11-25-95

IN. S.P.C. E ZONE, NAD 83
NAME: 15021202
N: 501586.2262(m)
E: 49152.7597(m)

Rockville Road 0 N/S



Original post set 1820 by Laughlin with witnesses: 14" beech N 15 E 8 links, 10" black walnut S 27 W 33 links per Marion County Atlas pg. 2. Mayhew 6-2-1859 called rock set in the road with no witnesses. 8-17-59 Monroe called a nail w/copper washer. 11-2-59 Monroe called the same. 11-21-63 Fleener called a PK nail. 9-20-77 Wilcoxon called a PK nail. 6-20-85 Green called the same. 9-19-90 excavated and Harrison set in accordance with Rockville Road construction Project. Re-tied 11-25-95 by Wilcoxon. Re-tied 5-5-2000 by Kiste.
HC521202

REF.	DISTANCE	DESCRIPTION
1.	86.10'	Cut 'x' W corner of signal box (concrete corner)
2.	93.11'	Tap nut of fire hydrant
3.	84.67'	Cut 'x' SE-bolt of signal base
4.	41.35'	Cut 'V' W-face of PVC lined post hole in concrete median
5.	50.08'	Cut 'x' NW-bolt of signal base
6.	45.26'	PK nail NE PwP no# 12"up
7.	77.25'	Cut 'x' NE-bolt of light pole base
8.	85.82'	Cut 'x' NE-bolt of signal base
9.	87.17'	Cut 'x' in concrete median
10.	98.43'	Cut 'x' SW-bolt of signal base